

ADJUSTMENTS (Con't.)

3. With a straight edge placed alongside the track, measure the distance from both ends of one ski. The distance at both the front and back of the ski should be equal, Fig. 2. When one ski is parallel with the track, measure across to the opposite ski to ensure that it is also parallel with the track. If adjustment is needed, the tie rods, Fig. 3, should be adjusted accordingly.

NOTE: The tie rod ends have left or right hand threads. Thus only the lock nuts need to be loosened and the tie rod rotated in the direction required to make adjustments.

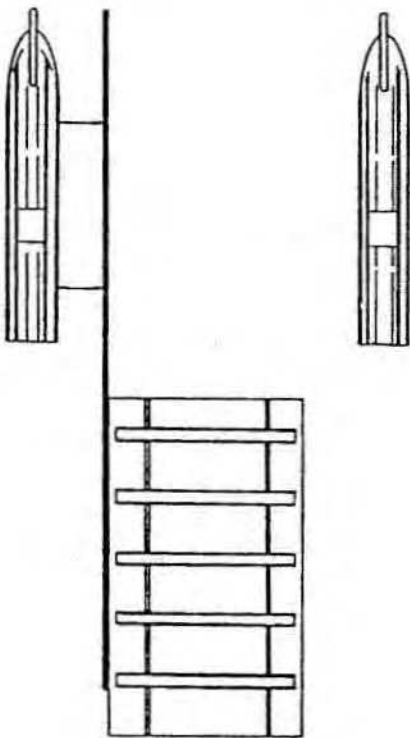


Figure 2

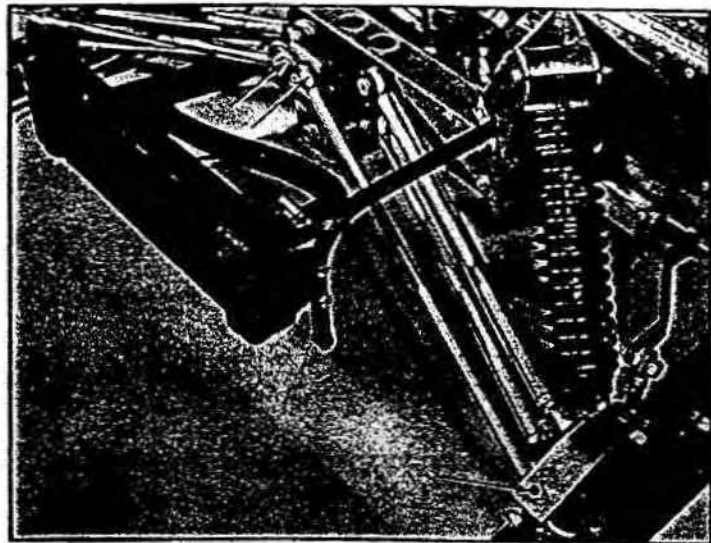


Figure 3

⚠ THERE SHOULD BE A MINIMUM OF 3/4" OF THREAD REMAINING IN THE TIE RODS FOR MAXIMUM SAFETY.